




TOP VIEW



EXPOSED THERMAL PAD ZONE

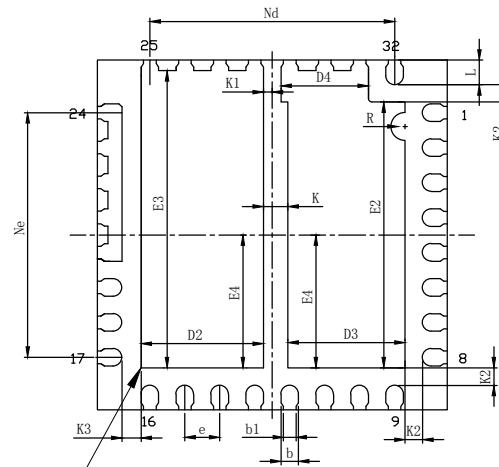

BOTTOM VIEW

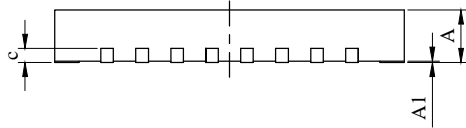

SIDE VIEW

SYMBOL	MILLIMETER		
	MIN	NOM	MAX
A	0.70	0.75	0.80
A1	0.00	0.02	0.05
b	0.20	0.25	0.30
b1	0.18REF		
c	0.203REF		
D	4.90	5.00	5.10
D2	1.65	1.75	1.85
D3	1.575	1.675	1.775
D4	1.15	1.25	1.35
e	0.50BSC		
Nd	3.50BSC		
E	4.90	5.00	5.10
E2	3.70	3.80	3.90
E3	4.15	4.25	4.35
E4	1.80	1.90	2.00
E5	1.80	1.90	2.00
Ne	3.50BSC		
L	0.30	0.35	0.40
K	0.30	0.35	0.40
K1	0.08	0.13	0.18
K2	0.20	0.25	0.30
K3	0.225	0.275	0.325
R	0.20REF		

** 特殊设计: 无

更改标记	更改内容	签名	日期	
华天科技 (西安) 有限公司 HuaTian Technology (Xi'an) CO., LTD				
QFN32L (0505X0.75-0.50) (E) 产品外形图		图号: HTDX03205050003		
		单位	版次	密级
		mm		0版
		第 1 张	共 1 张	

拟 制		复 审	
审 核		会 签	
制 图		标 准 化	
幅 面: A4		批 准	
		比 例:	

JEDEC MO-220 VHHE

