



TOP VIEW

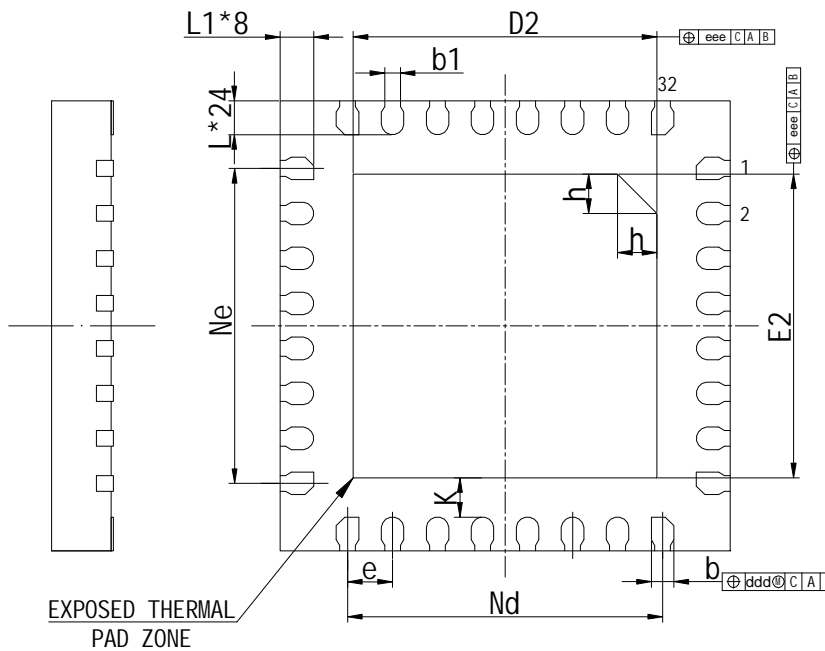

BOTTOM VIEW

	SYMBOL	MILLIMETER			
		MIN	NOM	MAX	
TOTAL THICKNESS	A	0.50	0.55	0.60	
STAND OFF	A1	0	0.02	0.05	
LEAD WIDTH	b	0.15	0.20	0.25	
LEAD END WIDTH	b1	0.14REF			
L/F THICKNESS	c	0.152REF			
BODY SIZE	X	D	3.90	4.00	4.10
	Y	E	3.90	4.00	4.10
LEAD PITCH	e	0.40BSC			
EP SIZE	X	D2	2.60	2.70	2.80
	Y	E2	2.60	2.70	2.80
ACCUMULATIVE PITCH	X	Nd	2.80BSC		
	Y	Ne	2.80BSC		
LEAD LENGTH	L	0.25	0.30	0.35	
	L1	0.23	0.28	0.33	
SPACING BETWEEN LEAD EDGE TO E-PAD EDGE	K	0.35REF			
PIN 1# ID	h	0.30	0.35	0.40	
PACKAGE EDGE TOLERANCE	aaa	0.10			
MOLD FLATNESS	bbb	0.10			
COPLANARITY	ccc	0.08			
LEAD OFFSET	ddd	0.10			
EXPOSED PAD OFFSET	eee	0.10			

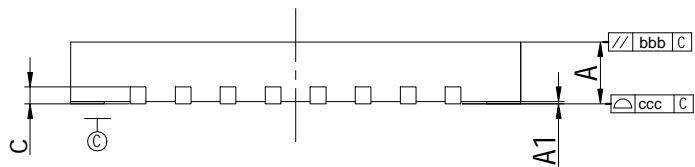

SIDE VIEW

**

特殊要求: 无

更改标记	更改内容	签名	日期	
华天科技(西安)有限公司 HuaTi an Technology(Xi'an)CO.,LTD				
QFN32L(0404X0.55-0.40)(H) 产品外形图		图号:HTDX03204040009		
		单位	版次	密级
		mm	0版	秘密
第 1 张		共 1 张		

参考图号 客户要求

拟 制		复 审	
审 核		会 签	
		标 准 化	
制 图		批 准	
幅 面: A4		比 例:	

